

Evaluating the ADN4693E-1 3.3 V, 200 Mbps, Full-Duplex, High Speed M-LVDS Transceiver**FEATURES**

- ▶ Easy evaluation of the [ADN4693E-1](#) 200 Mbps, full-duplex, M-LVDS transceiver
- ▶ Board layout optimized for high speed signaling
- ▶ Matched track lengths on M-LVDS differential pairs with controlled 100 Ω differential impedance
- ▶ Matched track lengths on high speed DI and RO logic signals with controlled 50 Ω impedance to GND
- ▶ SMA jacks for connecting to high speed DI and RO logic signals and the M-LVDS A, B, Y, and Z signals
- ▶ Optional screw terminal connectors for accessing the RO, \overline{RE} , DE, and DI logic signals
- ▶ Power and ground connections through screw terminal blocks
- ▶ Jumper-selectable driver enable and receiver enable via the \overline{RE} and DE pins
- ▶ Test points for measuring all signals and multiple ground points to facilitate probing of multiple signals
- ▶ 100 Ω termination resistors across A and B signals and Y and Z signals to simulate a terminated bus

EQUIPMENT NEEDED

- ▶ A 4 channel oscilloscope
- ▶ A signal generator
- ▶ A 3.0 V to 3.6 V power supply

EVALUATION KIT CONTENTS

- ▶ EVAL-ADN4693E-1EBZ

GENERAL DESCRIPTION

The EVAL-ADN4693E-1EBZ allows quick and easy evaluation of the ADN4693E-1 200 Mbps, full-duplex, multipoint, low voltage differential signaling (M-LVDS) transceiver. The EVAL-ADN4693E-1EBZ allows the input and output functions of the transceiver to be exercised without the need for external components. Subminiature A (SMA) connectors provide convenient connections for high speed logic and the M-LVDS bus signals. Screw terminal blocks are available to access power, ground, and digital signals. Jumper options allow control of the driver and receiver enable pins of the transceiver.

The EVAL-ADN4693E-1EBZ is optimized for high speed signaling. The differential M-LVDS signal traces on the board are routed as length matched 100 Ω differential pairs. The EVAL-ADN4693E-1EBZ features a solid ground and power plane for optimum power integrity.

The EVAL-ADN4693E-1EBZ has a footprint for the ADN4693E-1 full-duplex transceiver in a 4 mm \times 4 mm, 16-lead, lead frame chip scale package (LFCSP).

For full details on the ADN4693E-1, see the ADN4693E-1 data sheet, which must be used in conjunction with this user guide when using the EVAL-ADN4693E-1EBZ.

TABLE OF CONTENTS

| | | | |
|-------------------------------------|---|--|---|
| Features..... | 1 | Setting Up the Evaluation Board..... | 4 |
| Equipment Needed..... | 1 | Input and Output Connections..... | 5 |
| Evaluation Kit Contents..... | 1 | Jumper Connections..... | 5 |
| General Description..... | 1 | Evaluation Board Schematic and Layout..... | 6 |
| EVAL-ADN4693E-1EBZ Evaluation Board | | Ordering Information..... | 9 |
| Photograph..... | 3 | Bill of Materials..... | 9 |
| Evaluation Board Configuration..... | 4 | | |

REVISION HISTORY**3/2022—Revision 0: Initial Version**

EVAL-ADN4693E-1EBZ EVALUATION BOARD PHOTOGRAPH

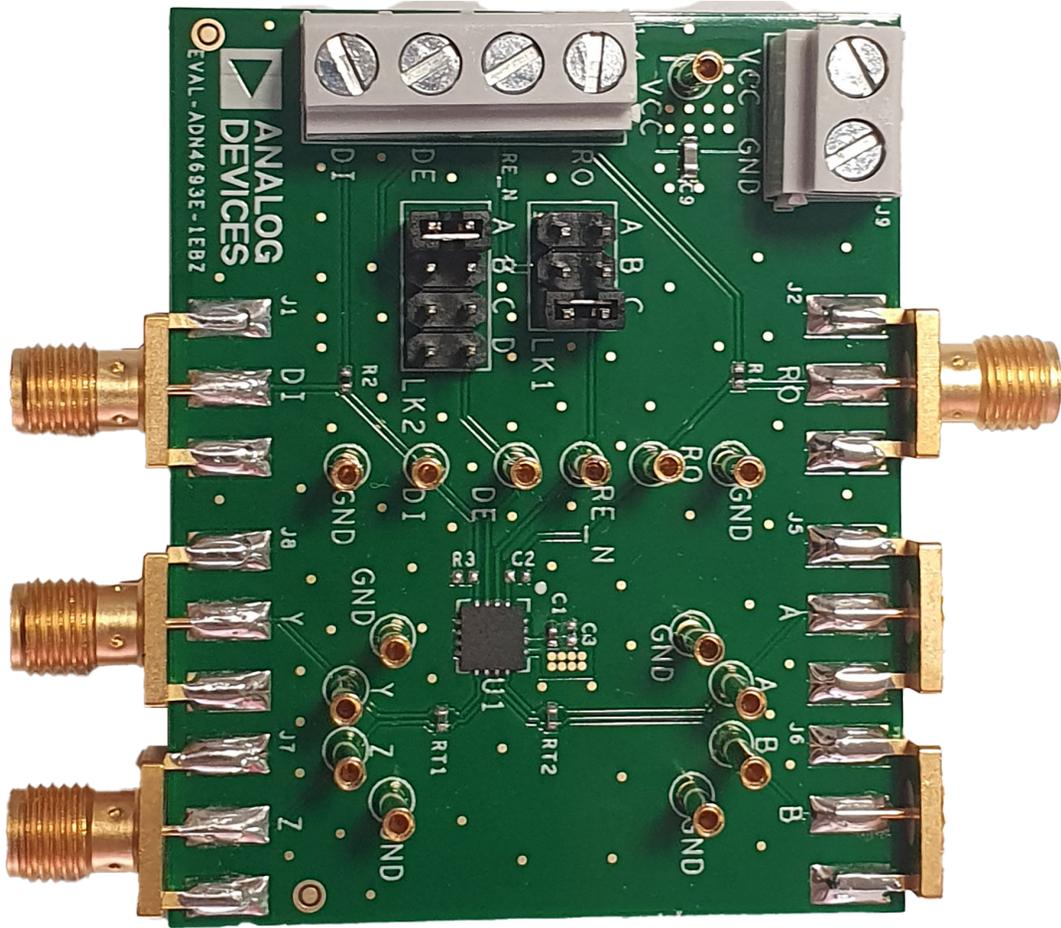


Figure 1.

100

EVALUATION BOARD CONFIGURATION

SETTING UP THE EVALUATION BOARD

The EVAL-ADN4693E-1EBZ allows the ADN4693E-1 to be quickly and easily evaluated. The EVAL-ADN4693E-1EBZ allows all of the input and output functions to be exercised without the need for external components. Jumper configurations are shown in Table 3.

The EVAL-ADN4693E-1EBZ is powered by connecting a 3.3 V power supply to the VCC and GND connections of the J9 screw terminal block. The supply current is typically 1 mA with the driver and receiver disabled. A 10 μ F decoupling capacitor, C9, is fitted at the VCC connector. A 100 nF decoupling capacitor, C1, is included at the supply pins of the ADN4693E-1, with a placeholder for an additional capacitor, C3.

The ADN4693E-1 full-duplex transceiver contains both a driver and receiver that can be individually enabled or disabled via jumper options. The driver can be enabled or disabled by setting the driver enable signal, DE, via the LK2 jumper. The receiver can be enabled or disabled by setting the RE signal, via the LK1 jumper. The DE and RE signals can also be accessed via the J1-4 screw terminal block for dynamic control via a processor or a signal generator.

For optimum signal integrity, the ADN4693E-1 digital input signal, DI, and receiver output signal, RO, are routed to the SMA connectors, J1 and J2, respectively. Alternatively the J1-4 screw terminal connectors can be used to access the DI and RO signals for easy

wire connections to a microprocessor. The connections to the J1-4 screw terminal block are made via 0 Ω resistors, which can be removed to eliminate any stub lengths along the interconnect. The DI input is terminated to GND with a 50 Ω resistor, R3. The RO trace includes an optional placeholder for a load capacitor at C2.

The M-LVDS input signals, A and B, and M-LVDS output signals, Y and Z, are accessed via the J5, J6, J8, and J7 SMA connectors, respectively. These A and B signals and Y and Z signals are routed as two differential pairs with a differential characteristic impedance of 100 Ω . The M-LVDS input signals are terminated at the A and B pins of the ADN4693E-1 with the 100 Ω resistor, RT2. The M-LVDS output signals are terminated at the Y and Z pins of the ADN4693E-1 with the 100 Ω resistor, RT1.

An example evaluation of the ADN4693E-1 driver and receiver is shown in Figure 2. A signal generator is connected to the DI pin via the J1 SMA connector, with an input signal of 100 MHz, a 50% duty cycle, and a swing of between 0 V and 3.3 V. To enable both the driver and the receiver, the LK1 jumper is set to Position C, and the LK2 jumper is set to Position A. The J8 SMA connector for Pin Y is connected to the J5 SMA connector for Pin A, and the J7 SMA connector for Pin Z is connected to the J6 SMA connector for Pin B. This setup connects the M-LVDS driver and receiver together in a point to point loopback network. In addition, oscilloscope probes are connected to the DI, A, B, and RO testpoints.

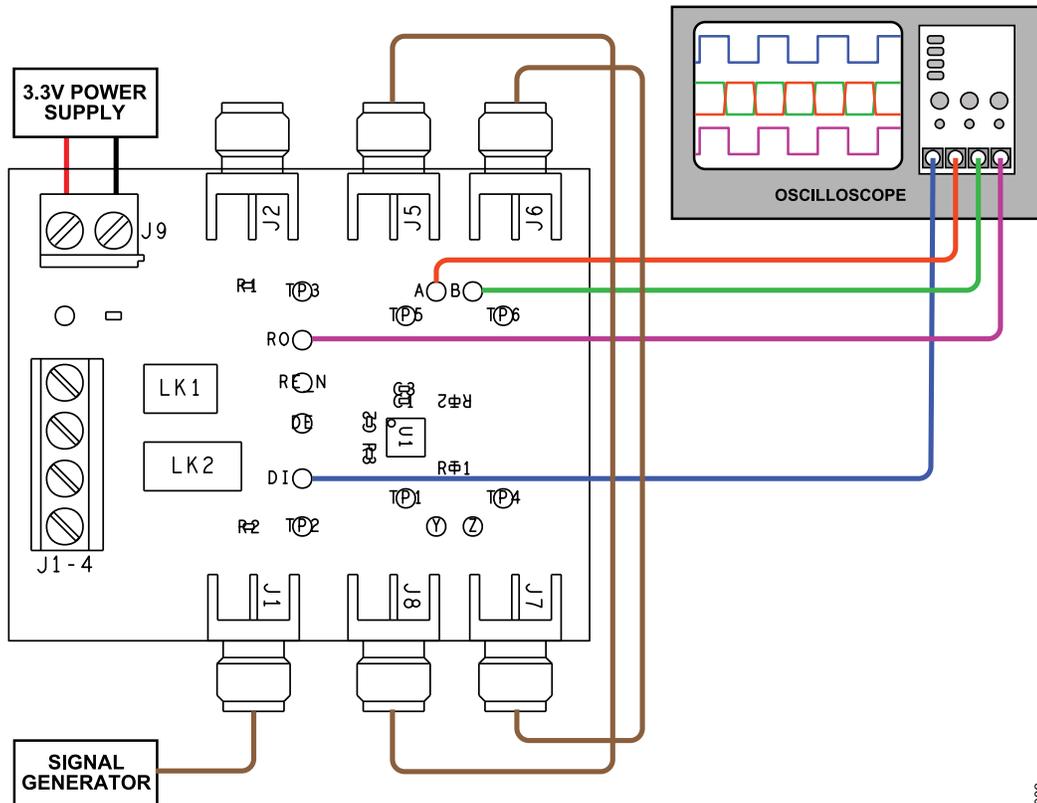


Figure 2. Example Evaluation of the ADN4693E-1 Driver and Receiver

002

EVALUATION BOARD CONFIGURATION

INPUT AND OUTPUT CONNECTIONS

Table 1 details the digital input and output connections, and Table 2 details the M-LVDS input and output connections.

Table 1. Digital I/O Connections

| Connection | DI | RO |
|----------------------|-------------|--------------------|
| SMA Connector | J1 | J2 |
| Terminal Connector | J1-4 via R2 | J1-4 via R1 |
| Load Capacitor | None | C2 (not populated) |
| Termination Resistor | R3 | None |

Table 2. M-LVDS Input and Output Connections

| Connection | Receiver | | | Transmitter | |
|----------------------|----------|-----|----|-------------|--|
| | A | B | Y | Z | |
| SMA Connector | J5 | J6 | J8 | J9 | |
| Termination Resistor | | RT2 | | RT1 | |

JUMPER CONNECTIONS

Table 3 details the jumper configurations.

Table 3. Jumper Configurations

| Jumper | Position | Description |
|--------|----------|--|
| LK1 | A | Connects the \overline{RE} pin of the ADN4693E-1 to VCC, which disables the receiver. This places the RO output into a high impedance state. |
| | B | Connects the \overline{RE} pin of the ADN4693E-1 to the \overline{RE} connection on the J1-4 screw terminal connector. |
| | C | Connects the \overline{RE} pin of the ADN4693E-1 to GND, which enables the receiver. |
| LK2 | A | Connects the DE pin of the ADN4693E-1 to VCC, which enables the driver. |
| | B | Connects the DE pin of the ADN4693E-1 to the DE connection on the J1-4 screw terminal connector. |
| | C | Connects the DE pin of the ADN4693E-1 to GND, which disables the driver. This places the Y and Z outputs into a high impedance state. |
| | D | Connects the DE pin of the ADN4693E-1 to the \overline{RE} pin of the ADN4693E-1. Set the state of both the DE and \overline{RE} signals using the LK1 jumper. |

EVALUATION BOARD SCHEMATIC AND LAYOUT

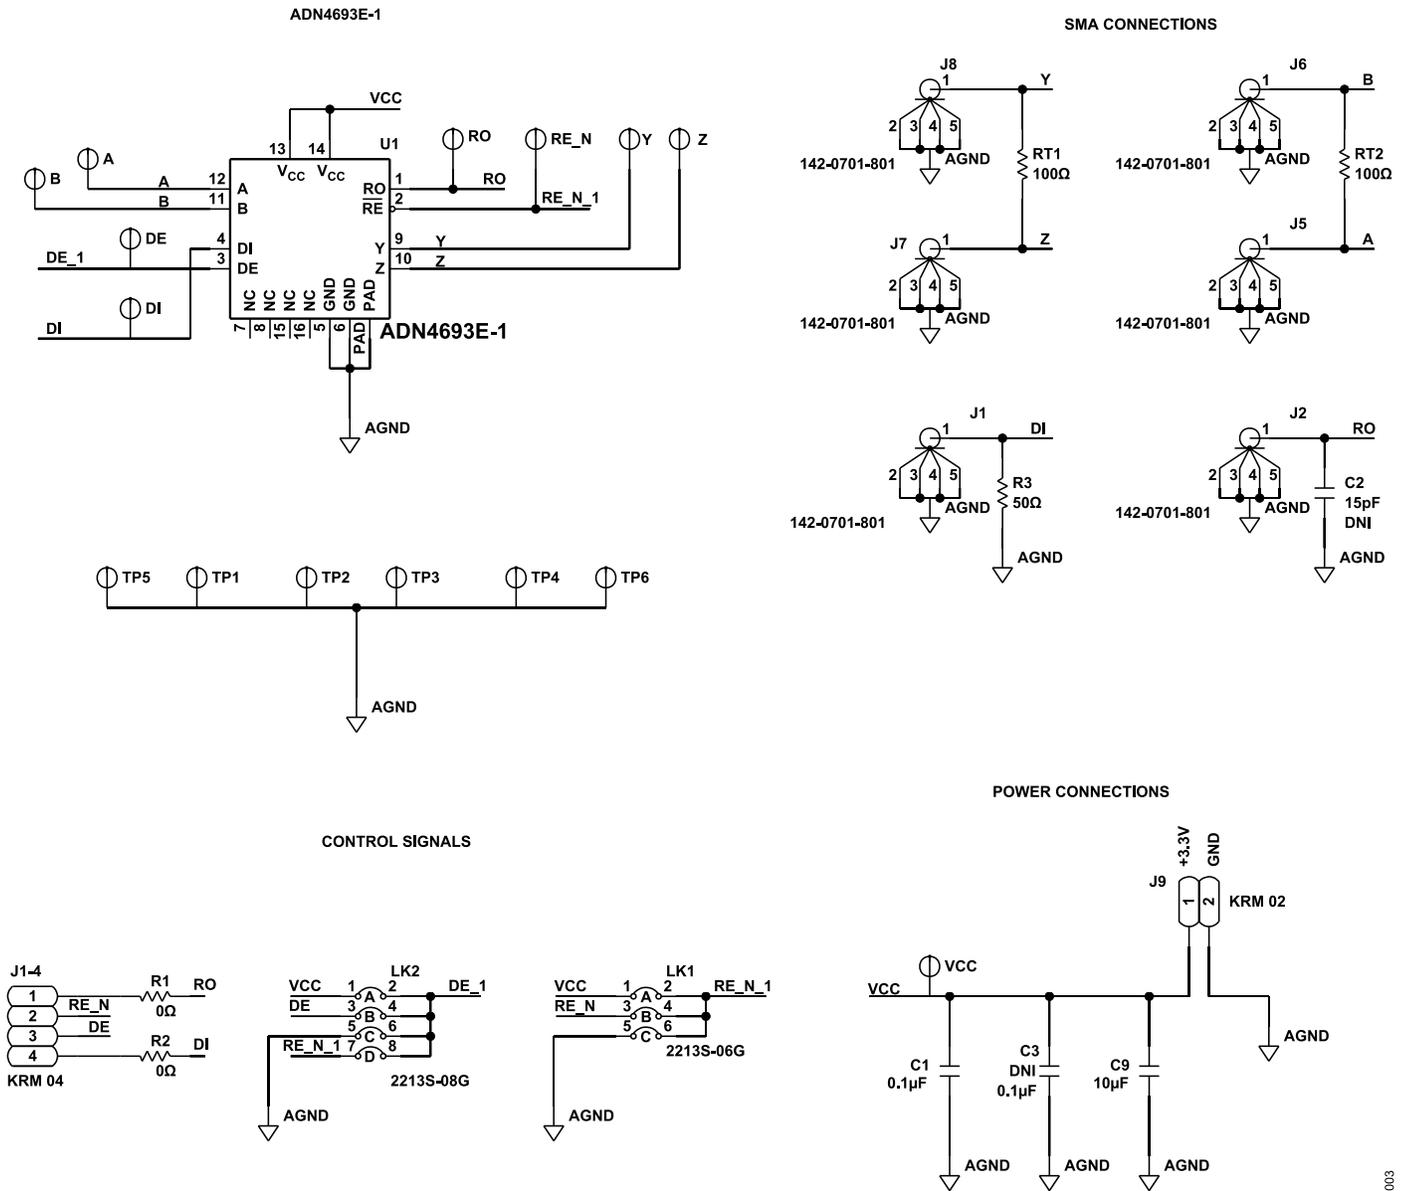


Figure 3. EVAL-ADN4693E-1EBZ Schematic

EVALUATION BOARD SCHEMATIC AND LAYOUT

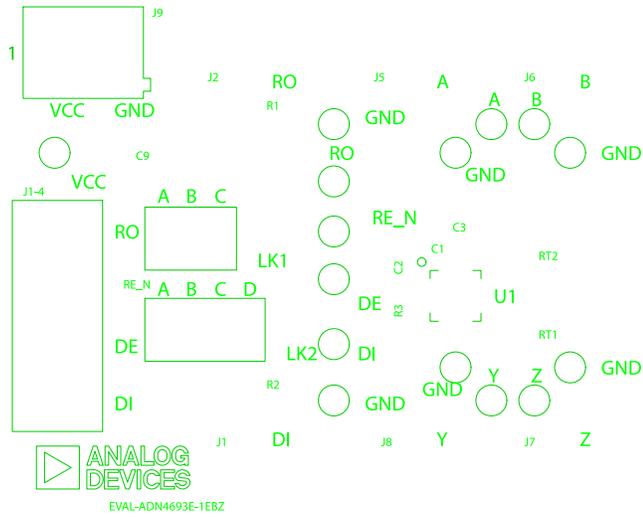


Figure 4. EVAL-ADN4693E-1EBZ Silkscreen

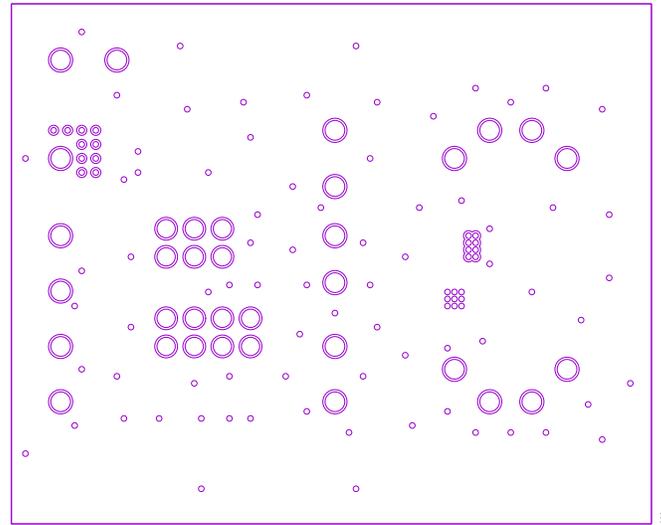


Figure 6. EVAL-ADN4693E-1EBZ Internal Layer 2 (GND)

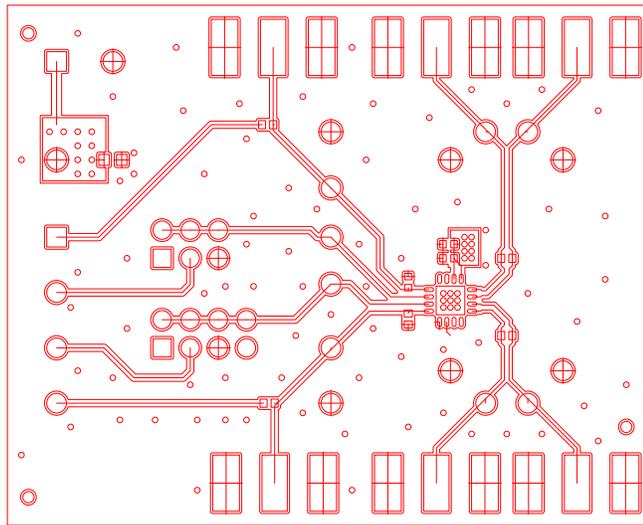


Figure 5. EVAL-ADN4693E-1EBZ Component Side

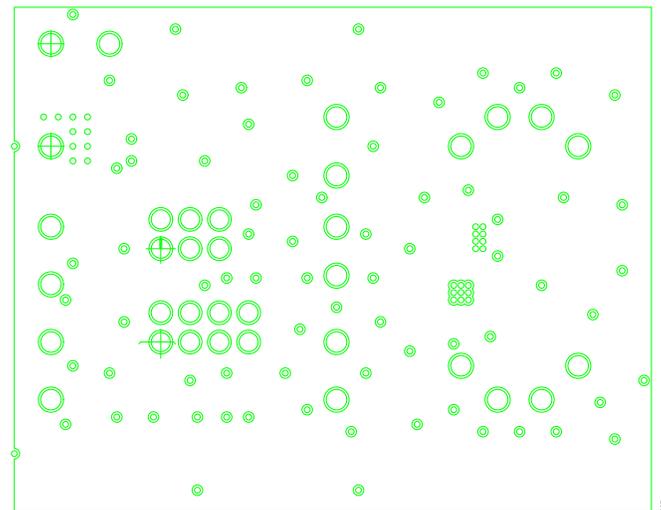


Figure 7. EVAL-ADN4693E-1EBZ Internal Layer 3 (VCC)

EVALUATION BOARD SCHEMATIC AND LAYOUT

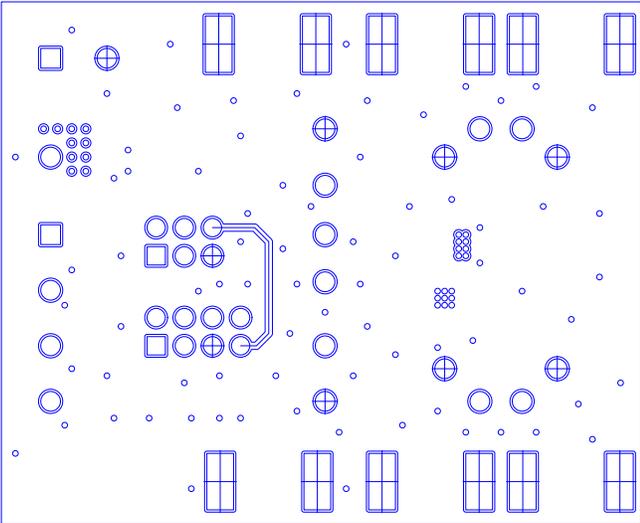


Figure 8. EVAL-ADN4693E-1EBZ Solder Side

ORDERING INFORMATION

BILL OF MATERIALS

Table 4.

| Quantity | Reference Designator | Description | Supplier and Part Number |
|----------|---|--|--|
| 6 | J1, J2, J5, J6, J7, J8 | Coaxial side launch SMA connectors | Cinch Connectivity 142-0701-801 |
| 1 | C1 | Capacitor, 0.1 μ F, 0402 | ATC 530L104KT16T |
| 1 | C9 | Capacitor, 10 μ F, 0603 | Murata GRM188R60J106ME47D |
| 1 | LK1 | 3-pin (3 \times 2), 0.1 inch header and shorting block | Multicomp 2213S-06G |
| 1 | LK2 | 4-pin (4 \times 2), 0.1 inch header and shorting block | Multicomp 2213S-08G |
| 1 | J1-4 | 4-way terminal block | Lumberg Automation KRM 04 |
| 1 | J9 | 2-way terminal block | Lumberg Automation KRM 02 |
| 2 | RT1, RT2 | Resistors, 100 Ω , 0402 | Vishay FC0402E1000BST1 |
| 1 | R3 | Resistor, 49.9 Ω , 0402 | FC0402E50R0BST1 |
| 2 | R1, R2 | Resistors, 0 Ω , 0402 | Yageo RC0402JR-070RL |
| 15 | TP1 to TP6, A, B, DE, DI, RE_N, RO, VCC, Y, Z | Test points | Mill-Max Mfg. 0319-1-15-15-18-27-04-0 |
| 1 | U1 | 200 Mbps, full-duplex, M-LVDS transceiver, 16-lead LFCSP | Analog Devices, Inc., ADN4693E-1BCPZ |
| 2 | C2, C3 | Capacitors, do not install, 0402 | Not applicable |

**ESD Caution**

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.

